
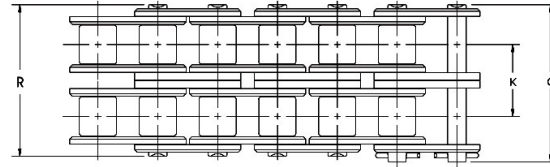


ISO 9001:2000	DIMENSIONS								WT.	TENSILE STRENGTH
Part Number	Pitch	Roller Width	Roller Dia.	Pin Dia.	Link Plate Thk.	C	R	K	Per ft	Average
inch									lbs.	
25	1/4	1/8	0.130*	0.090	0.030	0.37	0.34	—	0.84	875
25-2						0.63	0.59	0.252	0.16	1750
25-3						0.88	0.84	0.25	2625	
35	3/8	3/16	0.200*	0.141	0.050	0.56	0.50	—	0.21	2100
35-2						0.96	0.90	0.45	4200	
35-3						1.36	1.31	0.399	0.68	6300
35-4						1.76	1.70	0.91	8400	
40	1/2	5/16	0.312	0.156	0.060	0.72	0.67	—	0.41	4000
40-2						1.29	1.24	0.80	8000	
40-3						1.85	1.80	0.566	1.20	12000
40-4						2.42	2.37	1.60	16000	
41	1/2	1/4	0.306	0.141	0.050	0.65	0.57	—	0.26	2400
50	5/8	3/8	0.400	0.200	0.080	0.89	0.83	—	0.68	6600
50-2						1.60	1.55	1.32	13200	
50-3						2.31	2.26	0.713	1.98	19800
50-4						3.03	2.97	2.64	26400	
60	3/4	1/2	0.469	0.234	0.094	1.11	1.04	—	0.99	8500
60-2						2.01	1.94	1.95	17000	
60-3						2.91	2.84	0.897	2.88	25500
60-4						3.81	3.74	3.90	34000	

**STAINLESS STEEL, COUPLING, AND SPECIALTY CHAIN AVAILABLE UPON REQUEST**

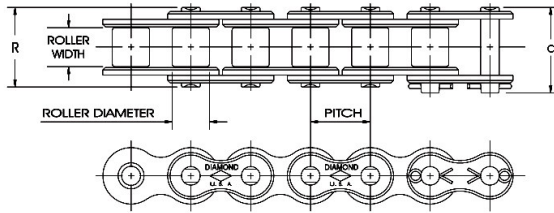

ISO 9001:2000	DIMENSIONS								WT.	TENSILE STRENGTH
Part Number	Pitch	Roller Width	Roller Dia.	Pin Dia.	Link Plate Thk.	C	R	K	Per ft	Average
inch									lbs.	
80	1	5/8	0.625	0.312	0.125	1.44	1.32	—	1.73	14500
80-2						2.59	2.47		3.37	29000
80-3						3.74	3.62	1.153	5.02	43500
80-4						4.90	4.79		6.73	58000
100	1 1/4	3/4	0.375	0.375	0.156	1.73	1.61	—	2.51	24000
100-2						3.14	3.02		4.91	48000
100-3						4.56	4.43	1.408	7.40	72000
100-4						5.97	5.84		9.80	96000
120	1 1/2	1	0.875	0.437	0.187	2.14	2.00	—	3.69	34000
120-2						3.93	3.79		7.35	68000
120-3						5.72	5.58	1.789	11.10	102000
120-4						7.52	7.38		14.70	136000
140	1 3/4	1	1.0000	0.500	0.219	2.31	2.14	—	5.00	46000
140-2						4.24	4.07		9.65	92000
140-3						6.16	6.00	1.924	14.30	138000
140-4						8.09	7.93		18.95	184000
160	2	1 1/4	1.125	0.562	0.250	2.73	2.54	—	6.53	58000
160-2						5.04	4.85		12.83	116000
160-3						7.35	7.16	2.305	19.03	174000
160-4						9.66	9.47		25.60	232000

**CUSTOMERS ARE ALWAYS ENCOURAGED TO VISIT FIT'S SHANGHAI QUALITY CONTROL CENTER**